



Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

Mini LED Beam Spider 8x10W RGBW Moving Head Lighting



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over $\pm 10\%$ while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.
5. After power off, if it is need used again, please cool down over 20 minuter.
6. Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-14 Channels Mode

Channel	Value	Function
1.	0-255	X-axis, move
2.	0-255	Y1-axis, move
3.	0-255	Y2-axis, move
4.	0-255	XY-axis, move speed adjustment
5.	0-255	Total dimmer, linear dimming-Dark to Bright
6.	0-255	Strobe, Slow to Fast
7.	0-140	AUTO Mode
	141-255	Voice Mode
8.	0-128	XY-axis AUTO Mode
	129-255	XY-axis Voice Mode
9.	0-255	Function Speed
10.	0-255	Red light color control
11.	0-255	Green light color control

12.	0-255	Blue light color control
13.	0-255	White light color control
14.	0-255	Reset

DMX Channel Summary-43 Channels Mode

Channel	Value	Function	
1.	0-255	X-axis, move	
2.	0-255	X-axis, Fine move	
3.	0-255	Y1-axis, Fine move	
4.	0-255	Y1-axis, Fine move	
5.	0-255	Y2-axis, Fine move	
6.	0-255	Y2-axis, Fine move	
7.	0-255	XY-axis, move speed adjustment	
8.	0-255	Total dimmer, linear dimming-Dark to Bright	
9.	0-255	Strobe, Slow to Fast	
10.	0-140	AUTO Mode	
	141-255	Voice Mode	
11.	0-128	XY-axis AUTO Mode	
	129-255	XY-axis Voice Mode	
12.	0-255	Function Speed	
13.	0-255	1#	Red light color control
14.	0-255		Green light color control
15.	0-255		Blue light color control
16.	0-255		White light color control

	2#...	3#...	4#...	5#...	6#...	7#...
41.	0-255	8#	Red light color control			
42.	0-255		Green light color control			
43.	0-255		Blue light color control			
44.	0-255		White light color control			

Display Control Instruction

Main menu	Sub menu	Function
d001	001-512	512 DMX
chnd	14 CH	14 Channel mode
	44 CH	44 Channel mode
SLND	auto	Auto
	soun	Sound
	SL 1	SLO1
	SL 2	SLO2
shnd	Sh1 2 3	Shnd
Sens	0-99	Sound setting
blnd	Blac Blod Soun auto	Balance Blod Sound auto
led	On off	Display screen on or off
disp	On off	Display upside down
rpan	YES NO	X-axis, move Flip
TIL1	YES NO	Y1-axis, move Flip
TIL2	YES NO	Y2-axis, move Flip
REST	YES	Rest

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.


A:Function

B:Up

C:Down

D:Enter

E:LED Display

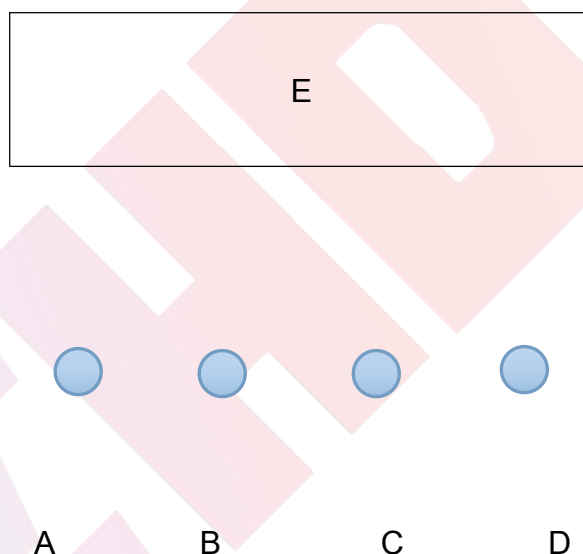

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * Power Supply: AC 90--275V, 50--60HZ
- * Power consumption: 80W
- * Fixing lamp: LED 8×10W RGBW
- * DMX-Control-channels: 14/44 DMX Channels
- * Shuttle: Flash rate: 0--10HZ
- * Dimmer: 0-100% mechanic dimmer
- * Long Lifespan LEDs (more than 60,000 hours)