
LED Beam 36x3W RGBW Moving Head Lighting



SHEHDS®

Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

Attention Item


- 1.For guarantee the life of product,please do not put it on the wet place and not use it the place over 40 degree.
- 2.Please don't lay the product on the un-fixable or shakable place.
- 3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-15 Channels Mode

serial number	instruction	instruction
Channel 1	X	Adjustment is turned up during 0-255, down regulate inversion
Channel 2	Y	Adjustment is turned up during 0-255, down regulate inversion
Channel 3	Tuned light	R, G, B, W, always open bubble from dark to bright
Channel 4	R	R That move light from dark to bright
Channel 5	G	G That move light from dark to bright
Channel 6	B	B That move light from dark to bright
Channel 7	W	W That move light from dark to bright
Channel 8	Strobe	0-255 Slow up, 255 The fastest speed
Channel 9	X,YThe motor speed	0-255 Slow up, 0 The fastest speed
Channel 10	Color mixing	0-255 Slow up, 255 The fastest speed
Channel 11	Color mixing speed	0-255 Slow up, 255 The fastest speed
Channel 12	Built-in program	0-240 has 8 modes of self walking, 255 is sound control
Channel 13	Sound	Sound sensitivity adjustment


	sensitivity adjustment	
Channel 14	X fine-tuning	Adjustment is turned up during 0-255, down regulate
Channel 15	Y fine-tuning	Adjustment is turned up during 0-255, down regulate

Display Control Instruction

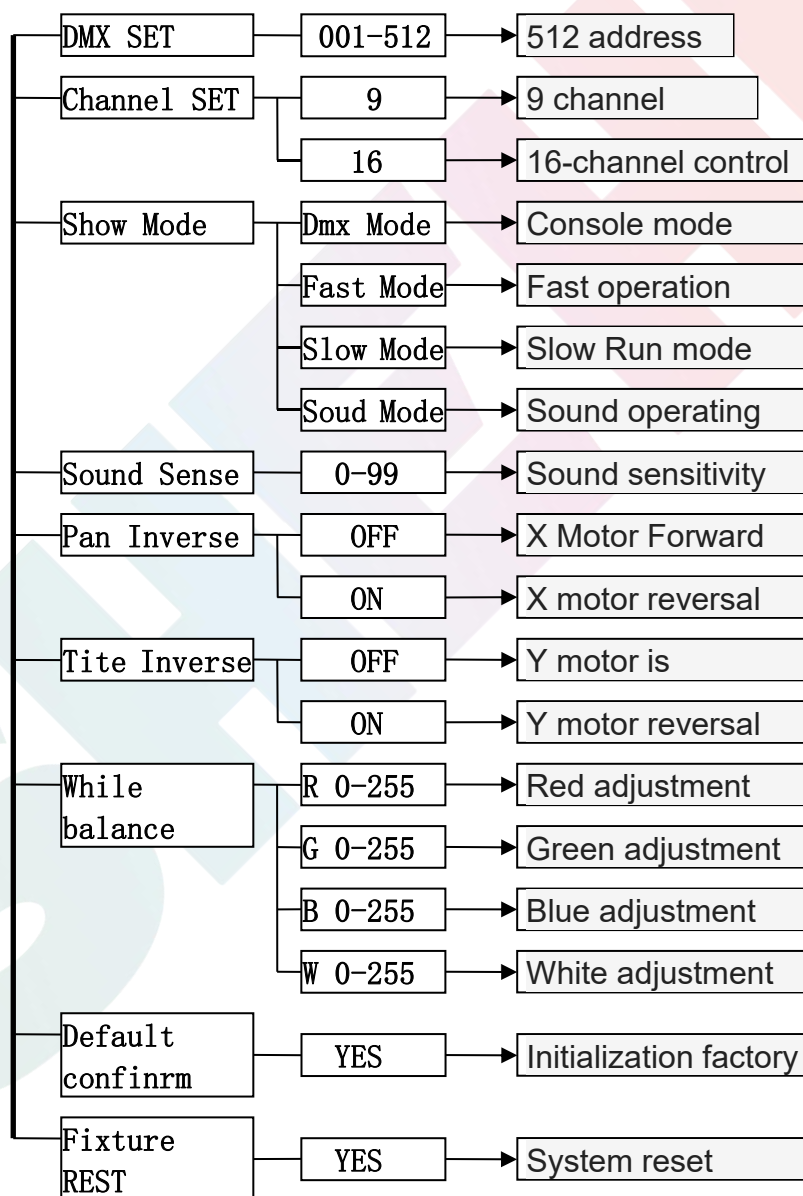

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

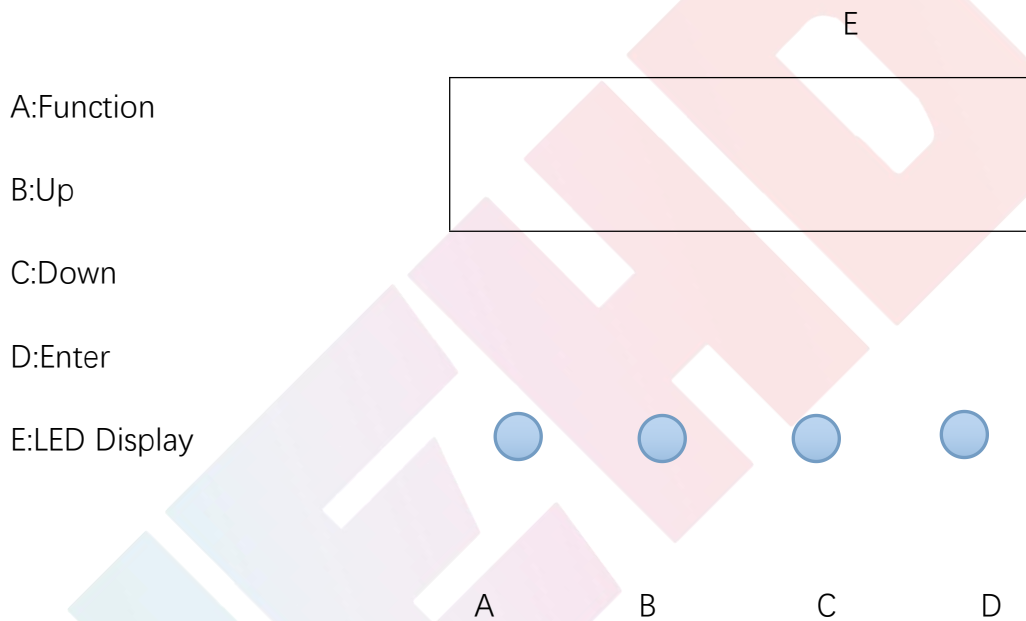

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * Power Supply: AC90--275V, 50--60HZ
- * Power consumption: 108W
- * Fixing lamp: LED 36×3W RGBW
- * DMX-Control-channels: 7/15 DMX Channels
- * Shuttle: Flash rate: 0--10HZ

-
- * Dimmer:0-100% mechanic dimmer
 - * Long Lifespan LEDs(more than 60,000 hours)

SHEHDS