

## USER'S MANUAL

### 4eyes 400W LED COB Blinder



#### Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

#### Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

#### Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over +&-10% while the light is using, it will be decreased the life

of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.

5. After power off, if it is need used again, please cool down over 20 minutes.

6. Please look round the manual for ensure the product can be used normally.


## Display Control Instruction

Display	Value	Function
R001	001- 512	DMX512 address code
CH**	1-14	1/2/3/4/8/9/10/14 channel mode
S-SL	SL/FA	DMX dimming speed setting
		SL: slow dimming; FA: fast dimming
d-Ho	Ho/oF	DMX signal loss processing mode setting:
		Ho: Keeping the last DMX signal status;
		oF: Turn off all LEDs
r255	000 - 255	1# COB dimming, from dark to bright
G255	000 - 255	2# COB dimming, from dark to bright
b255	000 - 255	3# COB dimming, from dark to bright
u255	000 - 255	4# COB dimming, from dark to bright
F255	000 - 255	Above 5 strobe, speed from slow to fast
1J15	00 - 15	Jump effect setting:
		UP button to select 1#-9# hopping effect
		DOWN key sets the jump speed.
1d15	00 - 15	Gradient effect settings:
		UP button to select 1 # -9 # gradient effect
		DOWN key to set the gradation speed.
CP15	00 - 15	Pulse, from slow to fast.
SU15	00 - 15	Voice control jumps, high sensitivity from low to high.
t 30	0-99	The current temperature display (optional) is displayed when not in use: t---

## Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can

produce a variety of vivid lighting effects,easy to operate, suitable for all types of entertainment decoration,architectural lighting industry.

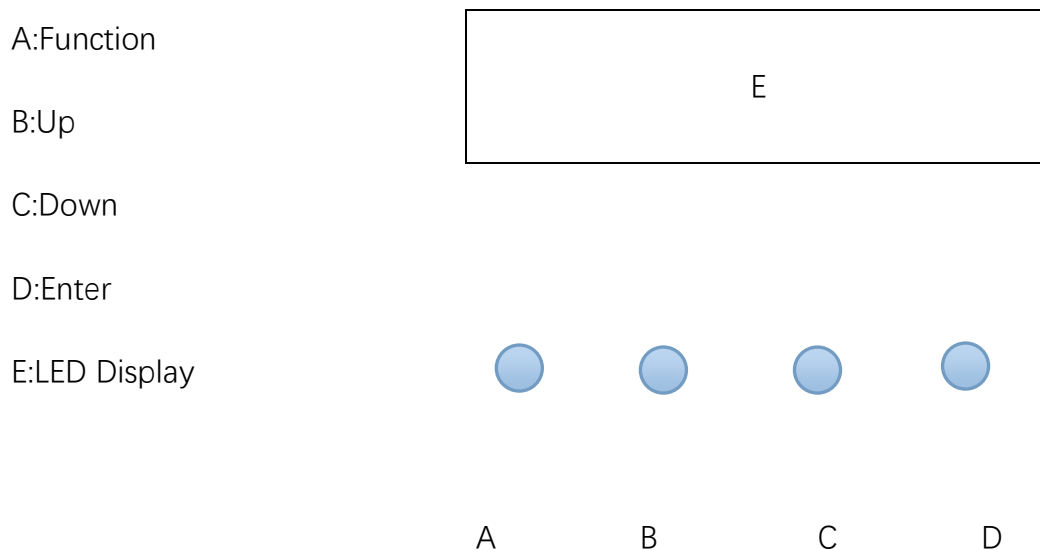

Instructions:Press the function key A cycled out the eight different function effects,digital tube first two digits on behalf of which the current function(see menu).The last two digits represent the functions in which the address code or speed parameters.Press the B or C key to modify the parameter values.Press the D key to confirm.

## Product Introduction

- \* Power Supply:AC90--275V,50--60HZ
- \* Power consumption:400W
- \* Fixing lamp:LED 4×100W Cool Warm white
- \* DMX-Control-channels:1/2/3/4/8/9/10/14 DMX Channels
- \* Shuttle:Flash rate:0--10HZ
- \* Dimmer:0-100% mechanic dimmer
- \* Long Lifespan LEDs(more than 60,000 hours)

## DMX Channel Summary-1 Channels Mode d001

Channel	Value	Function
CH1	0-255	1# 2# 3# 4# COB dimming

### DMX Channel Summary-2 Channels Mode d001

Channel	Value	Function
CH1	0-255	1# 2# 3# 4# COB Cool White
CH2	0-255	1# 2# 3# 4# COB Warm White

### DMX Channel Summary-3 Channels Mode d001

Channel	Value	Function
CH1	0-255	1# 2# 3# 4# COB dimming
CH2	0-255	total strobe
CH2	0-255	Cool white to Warm white

### DMX Channel Summary-4 Channels Mode d001

Channel	Value	Function
CH1	0-255	Total COB dimming
CH2	0-255	Total strobe
CH3	0-255	1# 2# 3# 4# COB Cool white
CH4	0-255	1# 2# 3# 4# COB Warm white

### DMX Channel Summary-8 Channels Mode A001

Channel	Value	Function
1	0-255	1# COB Cool white dimming
2	0-255	1# COB Warm white dimming
3	0-255	2# COB Cool white dimming
4	0-255	2# COB Warm white dimming
5	0-255	3# COB Cool white dimming
6	0-255	3# COB Warm white dimming
7	0-255	4# COB Cool white dimming
8	0-255	4# COB Warm white dimming

### DMX Channel Summary-9 Channels Mode A001

Channel	Value	Function
1	0-255	Total COB dimming
2	0-255	1# COB Cool white dimming
3	0-255	1# COB Warm white dimming
4	0-255	2# COB Cool white dimming

5	0-255	2# COB Warm white dimming
6	0-255	3# COB Cool white dimming
7	0-255	3# COB Warm white dimming
8	0-255	4# COB Cool white dimming
9	0-255	4# COB Warm white dimming

### DMX Channel Summary-10 Channels Mode A001

Channel	Value	Function
1	0-255	Total COB dimming
2	0-255	Total strobe
3	0-255	1# COB Cool white dimming
4	0-255	1# COB Warm white dimming
5	0-255	2# COB Cool white dimming
6	0-255	2# COB Warm white dimming
7	0-255	3# COB Cool white dimming
8	0-255	3# COB Warm white dimming
9	0-255	4# COB Cool white dimming
10	0-255	4# COB Warm white dimming

## DMX Channel Summary-14 Channels Mode A001

Channel	Value	Function
1	0-255	Total COB dimming
2	0-255	Total strobe
3	11-23	Manually select colors by CH4
	24-46	Warm white Gradient auto run mode
	47-58	Cool white Gradient auto run mode
	59-70	Cool Warm white Gradient auto run mode 1
	71-82	Cool Warm white Gradient auto run mode 2
	83-95	Cool white Gradient loop auto run mode
	96-107	Warm white Gradient loop auto run mode
	108-119	Cool white Gradient loop auto run mode
	120-130	Cool Warm white Gradient loop auto run mode
	131-165	Cool Warm white Jump loop auto run mode
	166-178	1# 2#COB Cool Warm white loop auto run mode
	179-191	COB Cool Warm white cross jump mode
	192-202	COB Cool Warm white up down jump mode
	203-214	COB Cool Warm white left right jump mode
	215-229	COB Cool Warm white mixing jump mode
	230-238	COB Cool Warm white random jump mode
	239-249	COB Cool Warm white random gradient mode
	250-255	Sound control
4	0-255	CH3 effect speed adjustment
5	0-255	Cool white to Warm white
6	0-255	Empty
7	0-255	1# COB Cool white dimming
8	0-255	1# COB Warm white dimming
9	0-255	2# COB Cool white dimming
10	0-255	2# COB Warm white dimming
11	0-255	3# COB Cool white dimming
12	0-255	3# COB Warm white dimming
13	0-255	4# COB Cool white dimming

14	0-255	4# COB Warm white dimming
----	-------	---------------------------

SHEHDS