

USER'S MANUAL

Wireless Remote Control LED Flat Par 7x9W RGB Lighting



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.

4. Power supply should not be changed over +&-10% while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.
5. After power off, if it is need used again, please cool down over 20 minutes.
6. Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-7 Channels Mode

Channel	Value	Function
CH1	Total dimming	R,G,B,W,total dimming,linear dimming form dark to light
CH2	Red	Red dimming,Linear dimming form dark to Bright
CH3	Green	Green dimming,Linear dimming form dark to Bright
CH4	Blue	Blue dimming,Linear dimming form dark to Bright
CH5	Function selection	01—50:DMX eight-channel control 51—100:transition 101—150:gradient 151—200:Clock change 201—255:Sound Activate
CH6	Total Strobe	Current function strobe
CH7	Function Speed	Function speed,from slow to fast

Display Control Instruction

NO	SHOW	Function Declaration
1	d001	Address code, (001 - 512) B, C key and numerical address code
2	iron	IR (ON, OFF) B, C key switch
3	P000	Colorful jump, (00 - 255) B, C key to modify the jumping speed
4	L000	Colorful gradient, (00 - 255) B, C key repair speed gradient
5	E000	Colorful pulse (00 - 255), B, C key to modify the pulse variable speed
6	soud	Colorful voice changes

7	r000	The red color selection, (000 - 255) B, C key to change the brightness
8	g000	The Green color selection, (000 - 255) B, C key to change the brightness
9	b000	The Blue color selection, (000 - 255) B, C key to change the brightness
10	F000	Strobe (000 - 255), B, C key to modify the flicker frequency

Infrared Function



Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

E


A:Function

B:Up

C:Down

D:Enter

E:LED Display

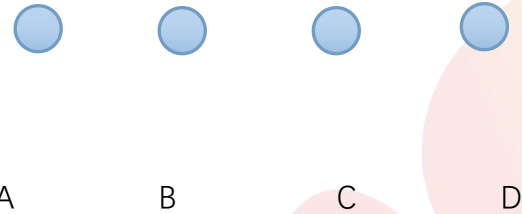

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * Power Supply: AC90--275V, 50--60HZ
- * Power consumption: 63W
- * Fixing lamp: LED 7×9W RGB
- * DMX-Control-channels: 7/15 DMX Channels
- * Shuttle: Flash rate: 0--10HZ
- * Dimmer: 0-100% mechanic dimmer
- * Long Lifespan LEDs (more than 60,000 hours)