



Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

30W COB-RGB



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.

- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-7 Channels Mode A001

Channel	Value	Function
CH1	0-255	Total dimming, from dark to bright
CH2	0-255	Red light color control
CH3	0-255	Green light color contro
CH4	0-255	Blue light color control
CH5	0-255	Total strobe, 005-255 from slow to fast
CH6	51-100	Preset color
	101-150	Auto Mode 1
	151-200	Auto Mode 2
	201-250	Auto Mode 3
	251-255	Sound Mode
CH7	0-255	CH6 Functional speed, from slow to fast

Display Control Instruction

Display	Value	Function
d001	001- 512	DMX512 address code set to 4-channel mode
Rfon	On /off	Wireless remote control function
r255	000 - 255	Red dimming, from dark to bright
G255	000 - 255	Green dimming, from dark to bright
b255	000 - 255	Blue dimming, from dark to bright
FH99	000 -099	strobe, speed from slow to fast
CLO8	01-08	Color present
CC99	01-99	Jump effect Auto Mode 1

<i>dE99</i>	01-99	Gradient effect Auto Mode 2
<i>CP99</i>	01-99	Pulse effect Auto Mode 3
<i>SU01</i>	01-09	Sound control

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.


A:Function

B:Up

C:Down

D:Enter

E:LED Display

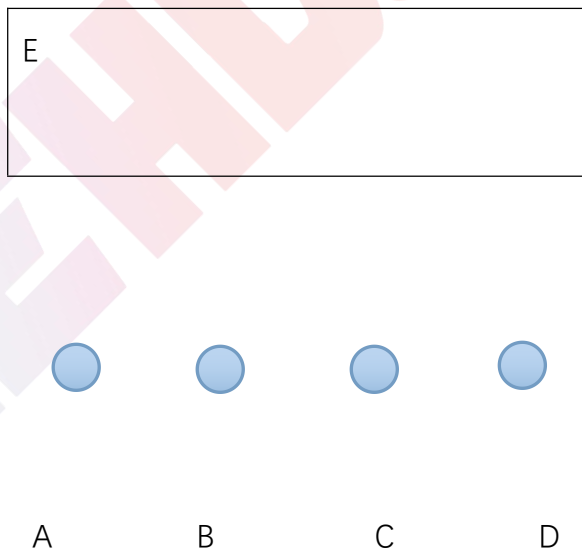

Instructions: Press the function key A to cycle out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

-
- * Power Supply:AC90--275V,50--60HZ
 - * Power consumption:30W
 - * Fixing lamp:LED 30W 3in1 RGB mixed
 - * DMX-Control-channels:7 DMX Channels
 - * Shuttle:Flash rate:0--10HZ
 - * Dimmer:0-100% mechanic dimmer
 - * Long Lifespan LEDs(more than 60,000 hours)

SHEHDS