



Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

LED 127x1W RGB Strobe Flash Light



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric

shock.

4.Power supply should not be changed over $\pm 10\%$ while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.

5.After power off,if it is need used again,please cool down over 20 minuter.

6.Please look round the manual for ensure the product can be used normally.

Display Control Instruction

Welcome to use our light.The light uses energy-saving LED,long Product life,shockproof,dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects,easy to operate, suitable for all types of entertainment decoration,architectural lighting industry.


A:Menu

B:Up

C:Down

D:Enter

E:LED Display

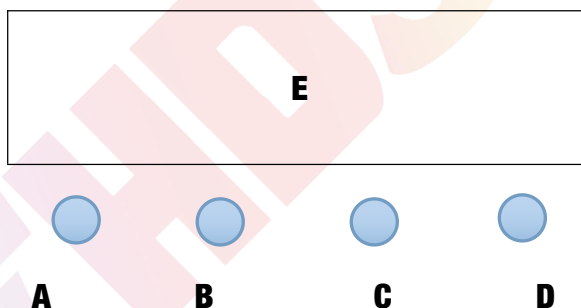

Instructions:Press the function key A cycled out the eight different function effects,digital tube first two digits on behalf of which the current function(see menu).The last two digits represent the functions in which the address code or speed parameters.Press the B or C key to modify the parameter values.Press the D key to confirm.

DMX Channel Summary-8 Channels Mode

Channel	Value	Function
CH1	0-255	Red dimming
CH2	0-255	Green dimmer
CH3	0-255	Blue dimmer
CH4	0-255	RGB strobe
CH5	0-255	Sound control
CH6	0-50	Effect 1
	51-100	Effect 2
	101-150	Effect 3
	151-200	Effect 4
	201-250	Effect 5
CH7	0-50	Effect 6
	51-100	Effect 7
	101-150	Effect 8
	151-200	Effect 9
	201-250	Effect 10
CH8	0-255	Effect Speed adjustment

Display Control Instruction

No	Display	Function
1.	d001-d512	8-channel address code
2.	A100-A116	Strobe speed
3.	A200-A216	Sound control speed
4.	A300-A316	Effect 1 speed
5.	A400-A416	Effect 2 speed
6.	A500-A516	Effect 3 speed
7.	A600-A616	Effect 4 speed
8.	A700-A716	Effect 5 speed
9.	A800-A816	Full auto mode
10.	r000-r255	Red
11.	G000-G255	Green
12.	b000-b255	Blue

Product Introduction

- * Power Supply:AC90--275V,50--60HZ**
- * Power consumption:127W**
- * Fixing lamp:127*1W RGBW 4in1 LED**
- * DMX-Control-channels:8 DMX Channels**
- * Shuttle:Flash rate:0--10HZ**
- * Dimmer:0-100% mechanic dimmer**
- * Long Lifespan LEDs(more than 60,000 hours)**

SHEHDS