



Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

LED Wall Wash 18x12W RGBW Lighting



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change


Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.

-
4. Power supply should not be changed over $\pm 10\%$ while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.
 5. After power off, if it is need used again, please cool down over 20 minuter.
 6. Please look round the manual for ensure the product can be used normally.

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

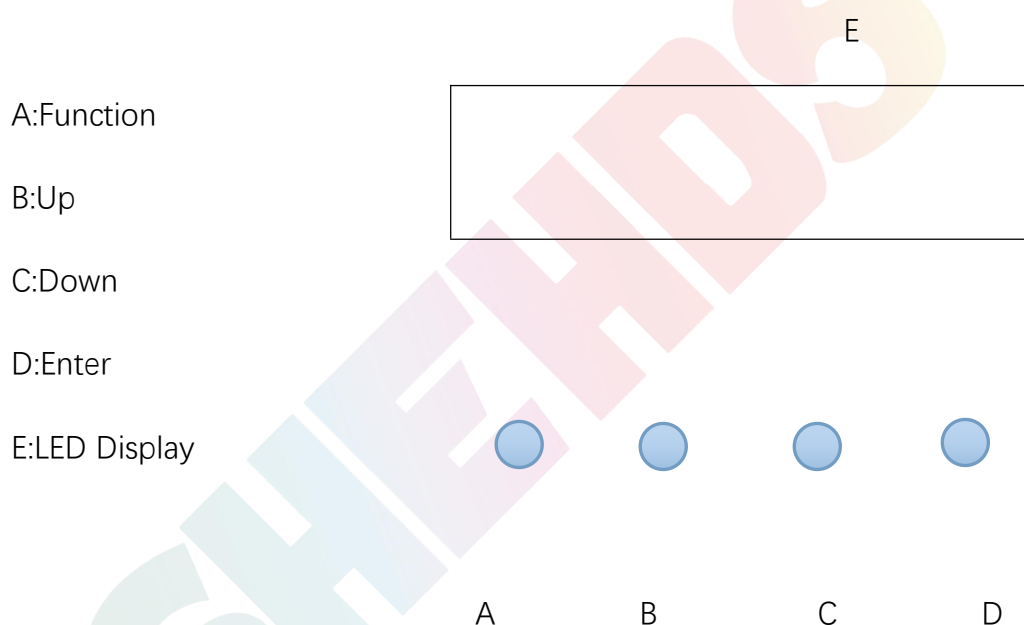

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * Power Supply: AC90--275V, 50--60HZ
- * Power consumption: 216W
- * Fixing lamp: LED 18×12W RGBW

- * DMX-Control-channels:8/76 DMX Channels
- * Shuttle:Flash rate:0--10HZ
- * Dimmer:0-100% mechanic dimmer
- * Long Lifespan LEDs(more than 60,000 hours)

Display Control Instruction

No	Display	Function
<i>ADD 1-AS2 1</i>	0-255	DMX Address
<i>AD00-AD 18</i>	4/8/72	Auto run mode
<i>E000-E255</i>	01-49	Strobe / Flash
<i>P000-P255</i>	0-255	Auto run mode speed
<i>r000- r255</i>	0-255	Red Color 0-255
<i>G000-G255</i>	0-255	Green Color 0-255
<i>b000-b255</i>	0-255	Blue Color 0-255
<i>W000-W255</i>	0-255	White Color 0-255
<i>ch8-ch76</i>	0-99	8/76 channel DMX Address

DMX Channel Summary-8 Channels Mode

Channel	Value	Function
CH1	0-255	Total Dimmer
CH2	0-255	Strobe / Flash Slow to Fast
CH3	30-99	Manual color selection
	100-149	Auto Mode 1
	150-199	Auto Mode 2
	200-206	Auto Mode 3
	207-212	Auto Mode 4
	213-220	Auto Mode 5
	221-227	Auto Mode 6
	228-234	Auto Mode 7
	235-241	Auto Mode 8
	242-255	Auto Mode 9

CH4	0-255	Auto Mode Speed
CH5	0-255	Red Dimmer
CH6	0-255	Green Dimmer
CH7	0-255	Blue Dimmer
CH8	0-255	White Dimmer

DMX Channel Summary-76 Channels Mode

Channel	Value	Function	
CH1	0-255	Total Dimmer	
CH2	0-255	Strobe / Flash Slow to Fast	
CH3	30-99	Manual color selection	
	100-149	Auto Mode 1	
	150-199	Auto Mode 2	
	200-206	Auto Mode 3	
	207-212	Auto Mode 4	
	213-220	Auto Mode 5	
	221-227	Auto Mode 6	
	228-234	Auto Mode 7	
	235-241	Auto Mode 8	
242-255	Auto Mode 9		
CH4	0-255	Auto Mode Speed	
CH5	0-255	1#LED	Red Dimmer
CH6	0-255		Green Dimmer
CH7	0-255		Blue Dimmer
CH8	0-255		White Dimmer
.....			
CH73	0-255	18#LED	Red Dimmer
CH74	0-255		Green Dimmer
CH75	0-255		Blue Dimmer
CH76	0-255		White Dimmer

SHEHDS