



Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

LED Flat Par 12x3W RGBW Color Lighting



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric

shock.

4.Power supply should not be changed over $\pm 10\%$ while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.

5.After power off,if it is need used again,please cool down over 20 minuter.

6.Please look round the manual for ensure the product can be used normally.

Display Control Instruction

Welcome to use our light.The light uses energy-saving LED,long Product life,shockproof,dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects,easy to operate, suitable for all types of entertainment decoration,architectural lighting industry.


A:Function

B:Up

C:Down

D:Enter

E:LED Display

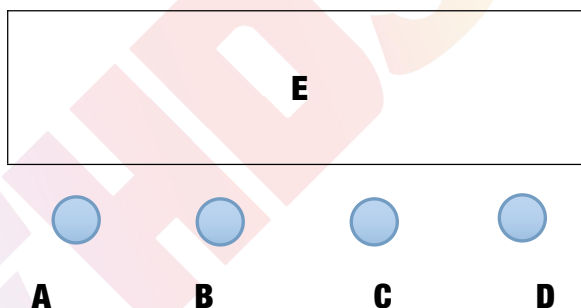

Instructions:Press the function key A cycled out the eight different function effects,digital tube first two digits on behalf of which the current function(see menu).The last two digits represent the functions in which the address code or speed parameters.Press the B or C key to modify the parameter values.Press the D key to confirm.

Product Introduction

- * **Power Supply:**AC90--240V,50--60HZ
- * **Power consumption:**36W
- * **Fixing lamp:**LED 144W RGBW Mixer Color
- * **DMX-Control-channels:**8 DMX Channels
- * **Shuttle:**Flash rate:0--10HZ
- * **Dimmer:**0-100% mechanic dimmer
- * **Long Lifespan LEDs**(more than 60,000 hours)
- * **Product Size:**20*20*8cm
- * **Product Weight:**0.95 kg
- * **Package Size:** 24*24*9.5 cm
- * **Package Weight:**1.2 kg



SHEHDS[®]

Stage Lighting Equipment Supplier Expert



<https://www.shehds.com/>



DMX Channel Summary-8 Channels Mode

Channel	Value	Function
CH1	Total Dimming	Total dimming
CH2	0--255	Red dimming
CH3	0--255	Green dimming
CH4	0--255	Blue dimming
CH5	0--255	White dimming
CH6	Total Strobe	Strobe from fast to slow
CH7	50-200	Auto Mode
	201-255	Sound Mode
CH8	CH7 control speed	Control speed for CH7, Auto+Sound Mode

Display Control Instruction

No	Display	Function
1	0001-0512	0-512, DMX Mode
2	RF on-off	Wireless remote control on/off
3	P000-P255	Colorful jump
4	L000-L255	Colorful pulse
5	E000-E255	Colorful gradient
6	Sound	Sound Mode
7	r001-r255	0--255, Purple 1 dimming
8	G001-G255	0--255, Purple 2 dimming
9	b001-b255	0--255, Purple 3 dimming
10	L001-L255	0--255, Purple 4 dimming
11	F000-F255	R, G, B, W, A flash, from slow to fast