



Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

Aluminum alloy LED Par 24x12W



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over $\pm 10\%$ while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.

-
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

Product Introduction

- * Power Supply:AC90--275V,50--60HZ
- * Power consumption:288W
- * Fixing lamp:LED 24*12W RGBW
- * DMX-Control-channels:4/8 DMX Channels
- * Shuttle:Flash rate:0--10HZ
- * Dimmer:0-100% mechanic dimmer
- * Long Lifespan LEDs(more than 60,000 hours)

Display Control Instruction

Welcome to use our light.The light uses energy-saving LED,long Product life,shockproof,dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects,easy to operate, suitable for all types of entertainment decoration,architectural lighting industry.


A:Function

B:Up

C:Down

D:Enter

E:LED Display

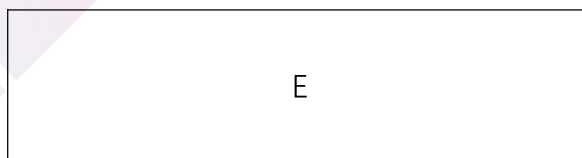

A



B



C



D

Instructions:Press the function key A cycled out the eight different function effects,digital tube first two digits on behalf of which the current function(see menu).The last two digits represent the functions in which the address code or speed parameters.Press the B or C key to modify the parameter values.Press the D key to confirm.

Display Control Instruction

Display	Function	Value	Detail
A00 I-A255	8CH	001- 512	8-channel mode
d00 I-d255	4CH	001- 512	4 channel mode
r00 I-r255	Red	000 - 255	Red dimming
G00 I-G255	Green	000 - 255	Green dimming
b00 I-b255	Blue	000 - 255	Blue dimming
U00 I-U255	White	000 - 255	White dimming
Fh0 I-Fh99	Strobe	000 - 255	Strobe, speed from slow to fast
cL0 I-cL08	Color	00 - 08	Quick Selection of Colors
cc0 I-cc99	Jump	00 - 99	Jump effect change
dE0 I-dE99	Gradient	00 - 99	Gradient effect change
cP0 I-cP99	Pulse	00 - 99	Pulse effect change
SoU I-SoU9	Sound	Sound	Sound control mode

DMX Channel Summary-4 Channels Mode ADD 1-255			
Channel	Function	Value	Detail
CH1	Red	0-255	Red dimming
CH2	Green	0-255	Green dimming
CH3	Blue	0-255	Blue dimming
CH4	White	0-255	White dimming

DMX Channel Summary-8 Channels Mode ADD 1-255			
Channel	Function	Value	Detail
CH1	Dimming	0-255	Total dimming, from dark to bright
CH2	Red	0-255	Red dimming
CH3	Green	0-255	Green dimming
CH4	Blue	0-255	Blue dimming
CH5	White	0-255	White dimming
CH6	Strobe	0-255	Total strobe
CH7	Function	51-100 101-150 151-200 201-250 251-255	Quick Selection of Colors RGBWA UV and mixing Color jump change Color gradient change Color pulse change Sound Mode
CH8	Speed	0-255	Function speed, from slow to fast