



Stage Lighting Equipment Supplier Expert

WELCOME TO JOIN US

USER'S MANUAL

LED Spot 4x10W RGBW Beam Moving Head Lighting



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over $\pm 10\%$ while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.

- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-13 Channels Mode

Channel	Value	Features
CH1	0-255	X axis rotation
CH2	0-255	X-axis fine-tuning
CH3	0-255	Y axis rotation
CH4	0-255	Y axis fine-tuning
CH5	0-255	XY speed adjustment
CH6	0-250	Total light adjustment
CH7	0-255	Strobe focusing
CH8	0-250	Red Dimmer
CH9	0-255	Green Dimmer
CH10	0-255	Blue Dimmer
CH11	0-255	White Dimmer
CH12	0-255	Auto Mode
CH13	0-255	Rest

DMX Channel Summary-39 Channels Mode

Channel	Value	Features
CH1	0-255	Head1 Pan
CH2	0-255	Head1 Pan fine
CH3	0-255	Head1 Tilt
CH4	0-255	Head1 Tilt fine
CH5	0-255	Head1 Speed
CH6	0-255	Head1-4 Whole dimmer
CH7	0-255	Head1-4 Whole strobe
CH8	0-255	Head1 Red
CH9	0-255	Head1 Green
CH10	0-255	Head1 Blue
CH11	0-255	Head1 White
CH12	0-255	Head2 Pan
CH13	0-255	Head2 Pan fine
CH14	0-255	Head2 Tilt
CH15	0-255	Head2 Tilt fine
CH16	0-255	Head2 Speed

CH17	0-255	Head2 Red
CH18	0-255	Head2 Green
CH19	0-255	Head2 Blue
CH20	0-255	Head2 White
CH21	0-255	Head3 Pan
CH22	0-255	Head3 Pan fine
CH23	0-255	Head3 Tilt
CH24	0-255	Head3 Tilt fine
CH25	0-255	Head3 Speed
CH26	0-255	Head3 Red
CH27	0-255	Head3 Green
CH28	0-255	Head3 Blue
CH29	0-255	Head3 White
CH30	0-255	Head4 Pan
CH31	0-255	Head4 Pan fine
CH32	0-255	Head4 Tilt
CH33	0-255	Head4 Tilt fine
CH34	0-255	Head4 Speed
CH35	0-255	Head4 Red
CH36	0-255	Head4 Green
CH37	0-255	Head4 Blue
CH38	0-255	Head4 White
CH39	150-255	Reset

Display Control Instruction

A001	001-512	DMX Console
CH9-28	CH13 CH39	9ch mode 39ch mode
Au01-02	Au01 Au02	Fast auto mode Slow auto mode
SnOn-Off	SnOn SnOff	Sound control Sound control off
rPoF	rPof rPon	X motor rotates X motor reverses
rToF	rTof rTon	Y motor rotates Y motor reverses

<i>rDoF</i>	rdof rdon	Display upward Display downward
<i>dFoF</i>	dFoF dFon	Initiation on Initiation of
<i>REST</i>	REST	Reset


A:Function

B:Up

C:Down

D:Enter

E:LED Display

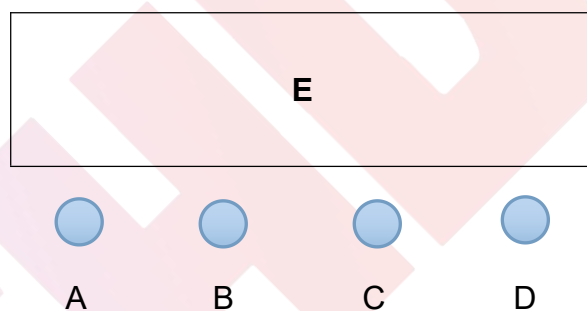

Button A is for the menu or ESC

Button B and C is to choose the function value

Button D is to confirm the function

Product Introduction

- Power Supply:AC90--275V,50--60HZ
- Power consumption:40W
- Light Source:LED 4 x10W RGBW ,Qty: 4pcs
- RGBW color mixing system
- DMX-Control-channels:9/39 DMX Channels
- Scan angle Pan: 540° Tilt: 270°
- Shuttle:Flash rate:0--10HZ
- Dimmer:0-100% mechanic dimmer
- Long Lifespan LEDs(more than 60,000 hours)

-
- Dimensions:110*18*32 CM/CTN
 - Base size:103*8*8 CM

SHEHDS