

USER'S MANUAL

1 Eyes 200W LED COB Lighting



Maintenance

- 1. Please keep the light in dryness and avoid using it in wet places.**
- 2. Using it intermittently can extend its life.**
- 3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.**
- 4. Please do not wipe the lens using organic solvents to avoid damaging the product.**

Statement

The product has good capability and intact packing when leaving the factory. All users should comply with the above warning items and manual. Any misuse causing damages is not included in our guarantee, and we cannot be responsible for any malfunction or problem due to ignoring the manual. Please forgive that we will not be notified for technical changes.

Attention Item

- 1. For guaranteeing the life of the product, please do not put it in wet places and do not use it in places over 40 degrees.**
- 2. Please don't lay the product on the unfixable or shakable place.**
- 3. Ask for a professional to maintain the product in order to avoid the danger of getting an electric shock.**
- 4. Power supply should not be changed over $\pm 10\%$ while the light is using, it will be decreased the**

- life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.
5. After power off, if it is need used again, please cool down over 20 minuter.
6. Please look round the manual for ensure the product can be used normally.

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.


A:Function

B:Up

C:Down

D:Enter

E:LED Display

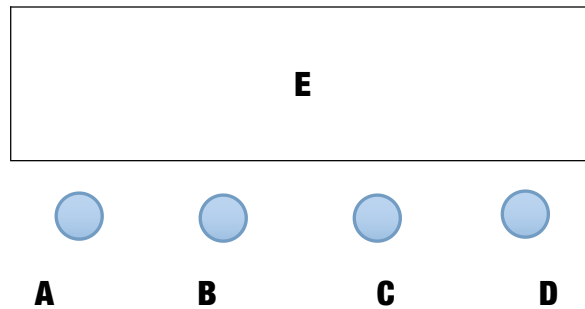

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * **Power Supply:** AC90--275V, 50--60HZ
- * **Power consumption:** 200W
- * **Fixing lamp:** LED 200W Cool White
- * **DMX-Control-channels:** 2 DMX Channels
- * **Shuttle:** Flash rate: 0--10HZ
- * **Dimmer:** 0-100% mechanic dimmer
- * **Long Lifespan LEDs:** (more than 60,000 hours)

DMX Channel Summary		
Channel	Value	Function
CH1	0-255	COB dimming, from dark to bright
CH2	0-255	Total strobe, 005-255 from slow to fast

Display Control Instruction		
Display	Translate	Function
<i>ADD 1-AS 12</i>	Address	DMX512 address channel mode
<i>oDD 1-o255</i>	Dimmer	Total dimming, from dark to bright
<i>FhD 1-Fh99</i>	Flash	Strobe
<i>SoUd</i>	Sound	Sound control mode