

## USER'S MANUAL

### LED Flat Par 7x18W RGBWA+UV Light



#### 1-Maintenance

- 1.Please keep the light in dryness and avoiding use in wet place.
- 2.Using intermittently can be extended the life.
- 3.Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
- 4.Please do not wipe the crust using organic menstruum for avoid to damaged the product.

#### 2-Statement

The product has well capability and intact packing when leave factory,All of the user should comply with above warning item and manual ,any misuse cause of the damages are not included in our guarantee,and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

#### 3-Attention Item

- 1.For guarantee the life of product,please do not put it on the wet place and not use it the place over 40 degree.
- 2.Please don't lay the product on the un-fixable or shakable place.
- 3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.

- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

#### 4-Display Control Instruction

Welcome to use our light.The light uses energy-saving LED,long Product life,shockproof,dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects,easy to operate, suitable for all types of entertainment decoration,architectural lighting industry.


A:Function

B:Up

C:Down

D:Enter

E:LED Display

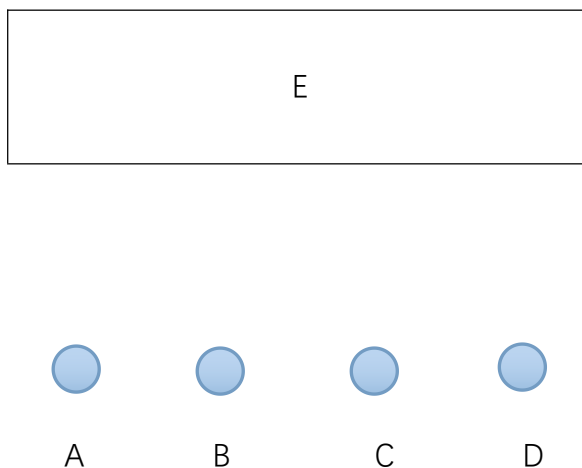

Instructions:Press the function key A cycled out the eight different function effects,digital tube first two digits on behalf of which the current function(see menu).The last two digits represent the functions in which the address code or speed parameters.Press the B or C key to modify the parameter values.Press the D key to confirm.

#### 5-Product Introduction

Power Supply:AC90--275V,50--60HZ

Power consumption:126W

Fixing lamp:LED 7×18W RGBWA UV

DMX-Control-channels:6/10 DMX Channels

Shuttle:Flash rate:0--10HZ

Dimmer:0-100% mechanic dimmer

Long Lifespan LEDs(more than 60,000 hours)

Product size: 17.9\*11.3\*17.8 CM

Product weight: 0.9 KG

### Display Control Instruction

No	Display	Function
1.	<b>d. 00 1</b>	6 channel address code
2.	<b>r. 00 1</b>	10-channel address code
3.	<b>r. 255</b>	Red selection, (001-255)
4.	<b>G. 255</b>	Green selection, (001-255)
5.	<b>b. 255</b>	Blue selection, (001-255)
6.	<b>u. 255</b>	White selection, (001-255)
7.	<b>y. 255</b>	Amber control (001-255)
8.	<b>P. 255</b>	Violet Color Control (001-255)
9.	<b>Fh. 80</b>	Strobe from fast to slow, 0~255
10.	<b>cL. 12</b>	Preset color
11.	<b>cc. 99</b>	Auto run mode (01-99)
12.	<b>dE. 99</b>	Auto run mode (01-99)
13.	<b>cP. 99</b>	Auto run mode (01-99)
14.	<b>SoU. 9</b>	Sound control mode (1-9)

**DMX Channel Summary-10 Channels Mode (R.001)**

Channel	Value	Function
1.	Dimming	linear dimming form dark to light
2.	Red	Red dimming,Linear dimming form dark to Bright
3.	Green	Green dimming,Linear dimming form dark to Bright
4.	Blue	Blue dimming,Linear dimming form dark to Bright
5.	White	White dimming,Linear dimming form dark to Bright
6.	Amber	Amber dimming,Linear dimming form dark to Bright
7.	Violet	Violet dimming,Linear dimming form dark to Bright
8.	Strobe	Strobe -RBGWA UV
9.	0-255	NO Effect Auto Mode 1 Auto Mode 2 Auto Mode 3 Sound Mode
10.	Speed	Function Speed Adjustment -CH9

**DMX Channel Summary-6 Channels Mode (d.001)**

Channel	Value	Function
1 .	Red	Red dimming,Linear dimming form dark to Bright
2 .	Green	Green dimming,Linear dimming form dark to Bright
3 .	Blue	Blue dimming,Linear dimming form dark to Bright
4 .	White	White dimming,Linear dimming form dark to Bright
5 .	Amber	Amber dimming,Linear dimming form dark to Bright
6 .	Violet	Violet dimming,Linear dimming form dark to Bright